
ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
△2	C	ECR # 061123-5 ADD LENGTH	11/23/06'
△3	D	ECR # 061218-6 ADD CABLE P/N	12/18/06'

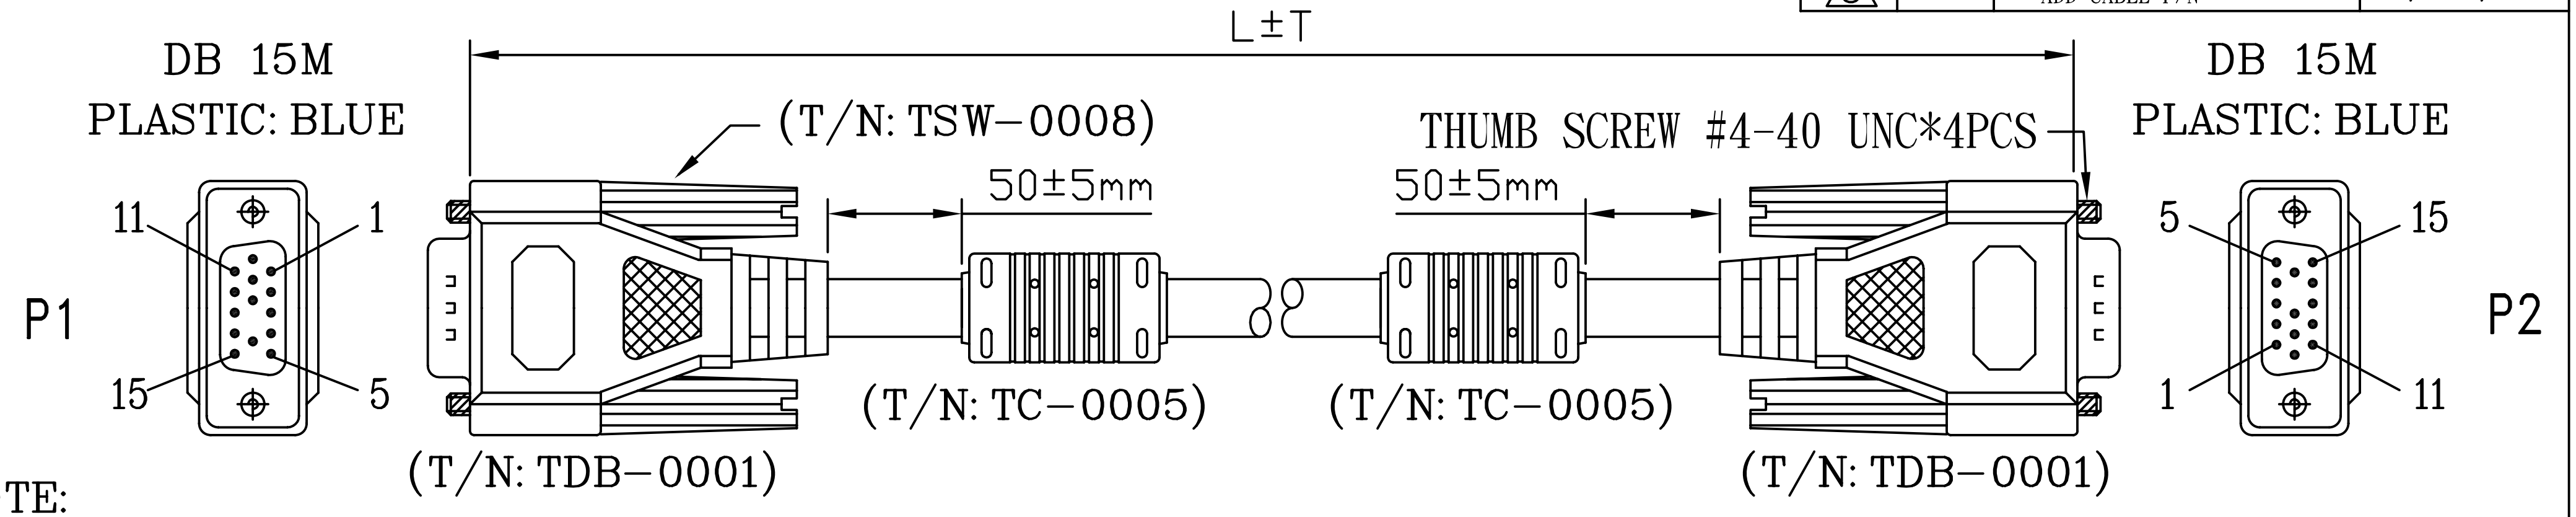

NOTE:

1. CABLE: UL 2919[30AWG(7/0.102 T.C)*1C INS: FOAM-PE ID: 1.3±0.05
+SPIRAL(T.C)]*3C INS: PVC ID: 2.3±0.1+28AWG(7/0.127 T.C)*7C
+INS: SR-PVC ID: ø0.9±0.05mm+AL/MY+DRAIN 30AWG(7/0.102 T.C)
+BRAID (16/4/0.1 T.C)+OUTER JACKET: PVC COLOR: BLACK(NK-K01)
OD: ø7.5±0.15mm, ***(C2919283BA)*** △3
2. CONNECTOR:
P1&P2: HDB 15P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL.
9TH PIN IS EMPTY.
3. FERRITE CORE: 17.5*28.5*9.5mm.
4. SHIELD: COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID.
5. HOOD: MOLDED TYPE,PVC 45P,COLOR: BLACK(NK-K01).
6. ELECTRICAL TEST: 100% OPEN SHORT MIS WIRE TEST .
CONTACT RESISTANCE 3Ω MAX
INSULATION RESISTANCE 10MΩ MIN
7. PACKING: <1>EACH PC / POLYBAG + EAN CODE LABEL & ROHS LABEL
<2>EACH CARTON / ROHS LABEL(L*W=35*22mm)

PIN OUT

P1	Wire	P2
1	RED	1
6	RED (shield)	6
2	GRAY	2
7	GRAY (shield)	7
3	BLUE	3
8	BLUE (shield)	8
4	BROWN	4
5	BLACK	5
10	ORANGE	10
11	WHITE	11
12	YELLOW	12
13	GREEN	13
14	RED	14
SHELL	BRAID	SHELL

CENTER ←
SHIELDING ←

DWG	P/N	L±T	EAN CODE	
120-2620-6	CV0018	20000±200mm	4260113562994	△2
120-2620-5	CV0017	15000±150mm	4260113562512	
120-2620-4	CV0016	10000±100mm	4260113562505	△1
120-2620-3	CV0003	5000±50mm	4260113560204	
120-2620-2	CV0002	3000±30mm	4260113560198	
120-2620-1	CV0001	1800±30mm	4260113560181	

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Draw FANNIE 12/18/06'
Chek
Engr

2DIRECT GMBH

Title: HDB 15M/M CABLE
Customer P/N
App'd
Customer E-DIR
Scale NONE Units m/m Third Angle Projection
Dwg No. 120-2620 REV:D Sheet 1/2

E009 V0.1